


SWING DOORS

Reinforced solid-square tube X-bracing and 3" wide vertical stiles, this door's strength is far superior to any other in the industry. Our patented latch with magnetic slide, designed for an optional cylinder, is factory installed on the swing door. The Super Durable Polyester paint on the doors is warranted not to peel, crack, flake, or delaminate for 40 years and is warranted not to fade for 35 years. Available in 30+ colors in 26-gauge steel.

Swing doors are mounted on 180° hinges attached to the hallway system. They can be a flush (flat) surface or corrugated (ridged). Swing doors typically come in widths of 3'-0" and are most widely selected due to cost savings or lack of headroom. Note that there are fire code considerations on swing doors. Check with your local authorities to get clarifications on any regulations that need to be met.

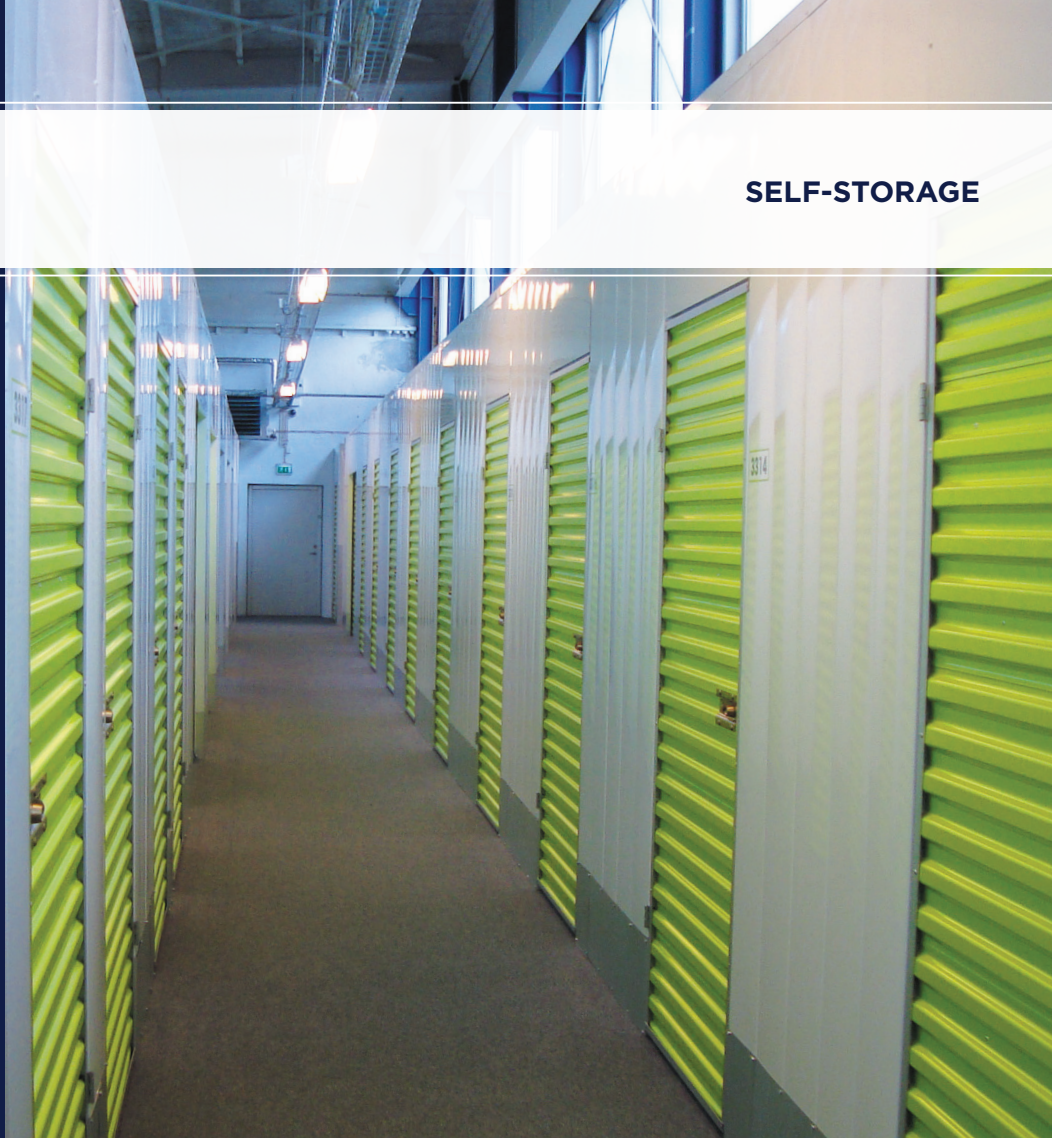

MDS Interior Swing Door Specs

» Swing Door Curtain

- 26-gauge grade 80 steel
- Finish: 30+ colors; Super Durable Polyester Paint
- Lock, Janus yellow zinc MDS mini latch
- Door stiles, top & bottom cap 20-gauge galvalume
- Door stiles are manufactured using a box design for added strength and rigidity
- Latch side door style is a one-piece manufactured component with a continuous striker plate as part of the design for added security
- X-bracing 1" x 1" 20-gauge galvanized square tubing keeps door from flexing, eliminating sharp edges
- 2-Button hinges—non-removable pin—per door (screws only; no pop rivets)

MDS EXTERIOR Swing Door Specs

» Swing Door Curtain

- 26-gauge grade 80 steel
- Finish: 30+ colors; Super Durable Polyester Paint
- Lock, Janus yellow zinc MDS mini latch
- Bottom bar 24-gauge galvalume with bulb astragal
- Door stiles, top & bottom cap 20-gauge galvalume
- Door stiles are manufactured using a box design for added strength and rigidity
- Latch side door style is a one piece manufactured component with a continuous striker plate as part of the design for added security
- X-bracing 1" x 1" 20-gauge galvanized square tubing keeps door from flexing, eliminating sharp edges
- 3-Button hinges—non-removable pin—per door (screws only; no pop rivets)

» Swing Door Z Frame

- 20-gauge galvanized
- Finish: Consult Sales Rep
- Fastened to existing door frame with #8 x 1/2" tek screws
- Z-frame fastened inside and outside for security
- Continuous overlapping style

» Drip Ledge

- 26-gauge galvanized
- Finish: 30+ colors; Super Durable Polyester Paint
- 3/4" x 1" to cover total length of frame
- Fastened to top Z-frame with #8 x 1/2" tek screws and caulked

» Wind Chain

- Attached to existing frame and to swing door with #8 x 1/2" tek screws



2025/03

CANADA HEADQUARTERS

3310 Langstaff Road,
Unit B, Vaughan, Ontario
L4K 4Z8

PLEASE VISIT OUR WEBSITE FOR ADDITIONAL INFORMATION:

- ADA Compliance
- Color Options
- Installation
- Technical Drawings
- Warranty
- Additional Locations

647-343-2760
marketing@janusintl.com
JanusCanada.ca